


CS series

■ Features

- General purpose miniature power relay boasting high reliability.
- PCB type, compact size, easy to use 2c relay.

■ Model numbering system

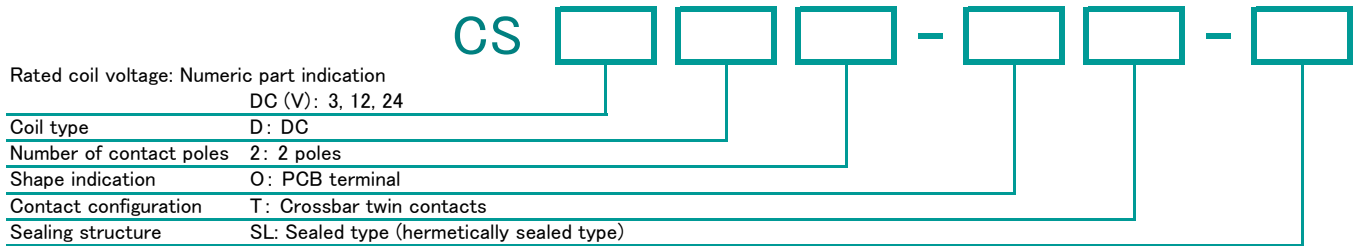

■ Safety standards

	Contact rating
UL (C-UL)	1A 120V AC
TUV	0.5A 120V AC
CQC	1A 120V AC

■ Coil ratings

AC/DC	Item Voltage	Rated current (mA)	Coil resistance (Ω)	Operate voltage (V)	Release voltage (V)	Maximum voltage (V)	Power consumption (W)
				Ratio to rated voltage			
DC	3	120	25	80% max.	5% min.	110%	0.36
	12	30	400				
	24	15	1600				

- Notes:
 1. Rated current and coil resistance are values at coil temperature of 20°C, tolerance is ±10%.
 2. Operate voltage and release voltage are values at coil temperature of 20°C.
 3. Maximum voltage is the maximum value of the allowable voltage fluctuation range of the relay coil operating power supply with the ambient temperature at 20°C.